
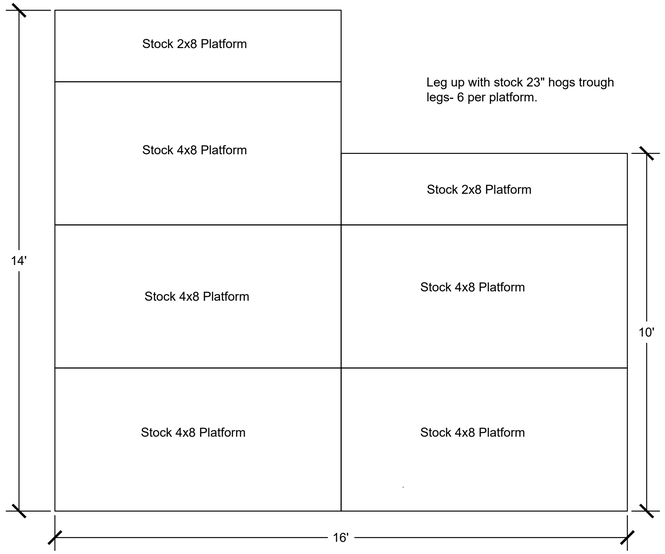



Leg up with stock 23" hogs trough legs- 6 per platform.

1 / D — Deck Overview
Stock Plats- 2' tall — 1/2" = 1'-0"

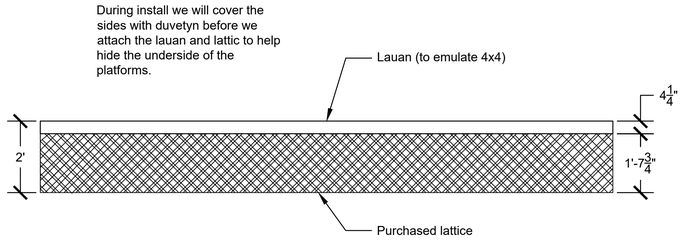


During install we will cover the sides with duvetyn before we attach the lauan and lattic to help hide the underside of the platforms.


2 / D — Deck Facings Overview- DS, SL, SR Sides
Lauan, Duvetyn, purchased lattice — 1/2" = 1'-0"




3 / D — Deck Facings Overview- DS, SL, SR Sides
Lauan Strips- cut 55 — 3/4" = 1'-0"

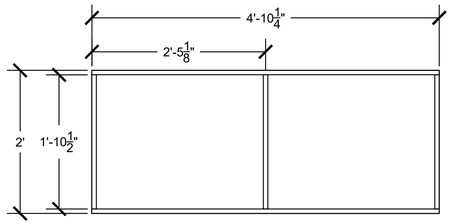


4 / D — Deck Addition Flat Framing
Standard Holllywood Flat Construction — 1" = 1'-0"

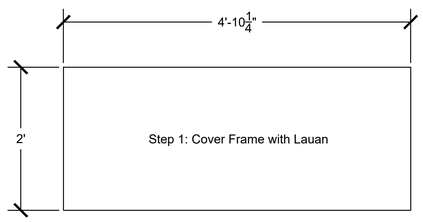


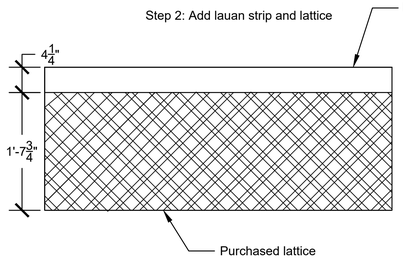


5 / D — Deck Addition Flat Facing
Lauan and Lattice — 1" = 1'-0"

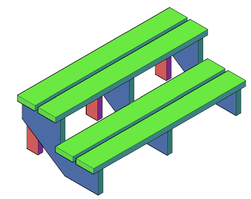


6 / D — Downstage Stairs Overview
2x Material — 3/4" = 1'-0"

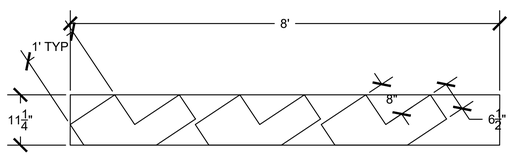


7 / D — Stair Carriages
2x12x8' — 3/4" = 1'-0"

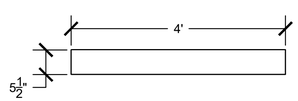

8 / D — Stair Treads
2x6- Cut 4 — 3/4" = 1'-0"




9 / D — Stair Legs
2x4- Cut 3 — 3/4" = 1'-0"

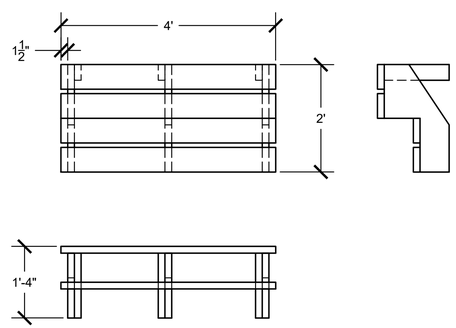


10 / D — Stair Assembly
Glue and screw — 3/4" = 1'-0"

See TD with questions.


Plate #: D	West Virginia Public Theatre
	Proof
	Deck & Stairs
Director: Lynn Antunovich	Technical Director: Abby Bender
Designer: Tetta Askeland	Drafter: Abby Bender
Date: 5/22/26	Scale: As Noted

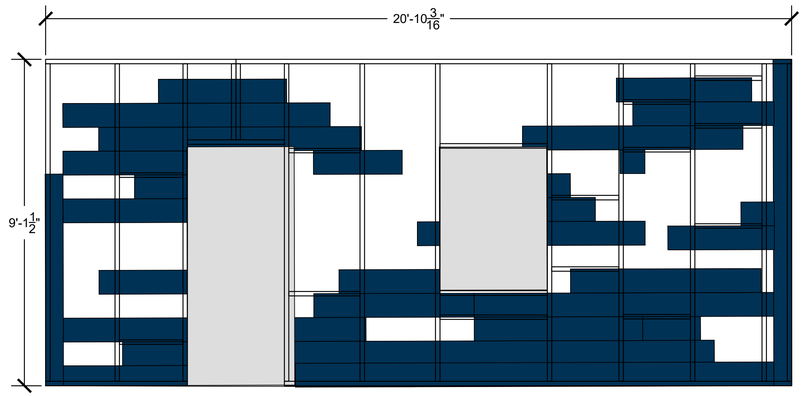


1 HB — House Base Overview
2x4 Construction with Lauan "Siding" 1/2" = 1'-0"

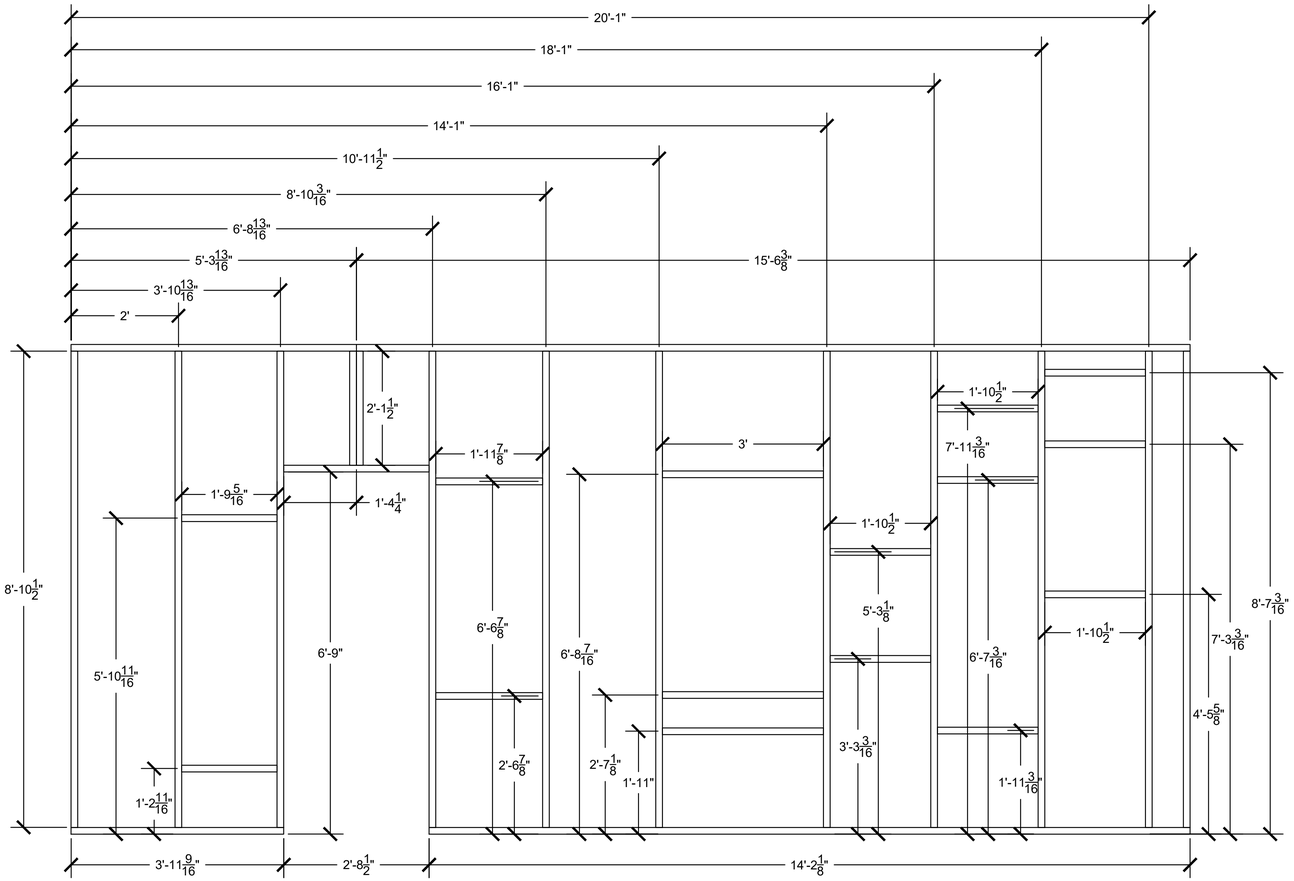


2 HB — House Base Framing
2x4 Construction- glue and framing nail 3/4" = 1'-0"

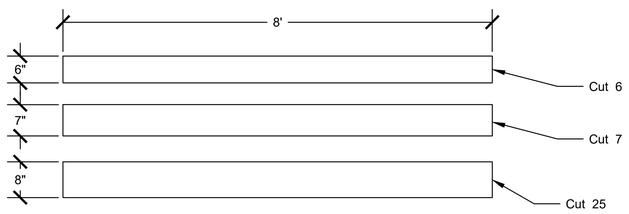


3 HB — Lauan "Siding"
Lauan Strips 3/4" = 1'-0"

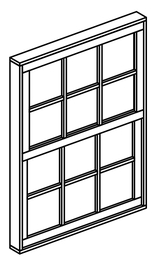


4 HB — House Base Window
1x Construction- non functional 3/4" = 1'-0"

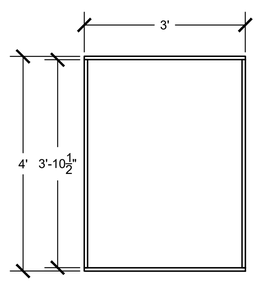

5 HB — House Base Window Frame
1x4- glue and MC staple 3/4" = 1'-0"

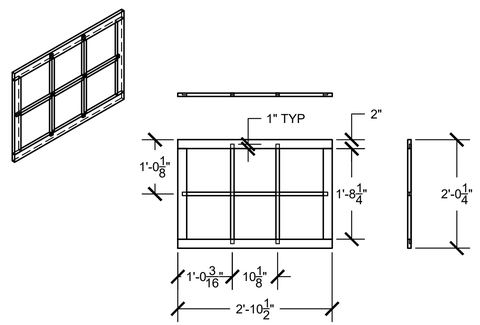


6 HB — House Base Window Sashes
Make 2: 1x material, half lap joinery, glue and NC staple 3/4" = 1'-0"

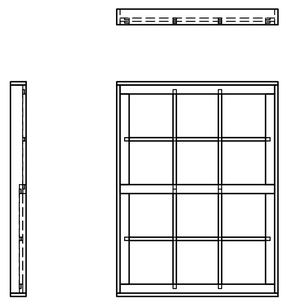


7 HB — House Base Window Assembly
Top sash flush with edge of frame, bottom sash immediately behind 3/4" = 1'-0"

See TD with questions.


Plate #: HB	West Virginia Public Theatre
	Proof
	House Base
Director: Lynn Antunovich	Technical Director: Abby Bender
Designer: Tetta Askeland	Drafter: Abby Bender
Date: 5/22/26	Scale: As Noted

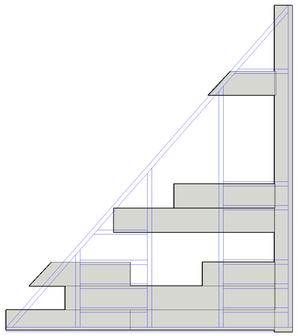


1 HSW — Side Wallls Overview
Make 2 R&R - 2x4 and lauan siding — 1/2" = 1'-0"

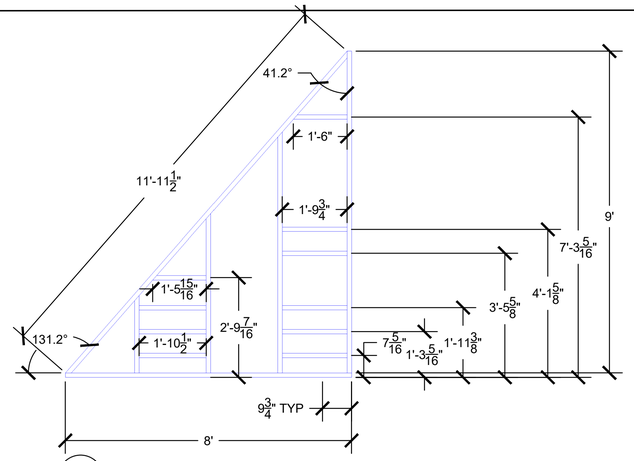

2 HSW — Side Wallls Framing
Make 2- 2x4 framing — 1/2" = 1'-0"

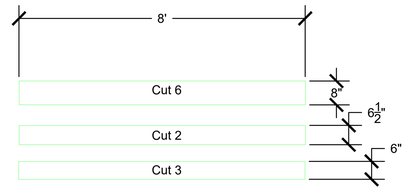

3 HSW — Side Walls Lauan Strips
Lauan — 1/2" = 1'-0"

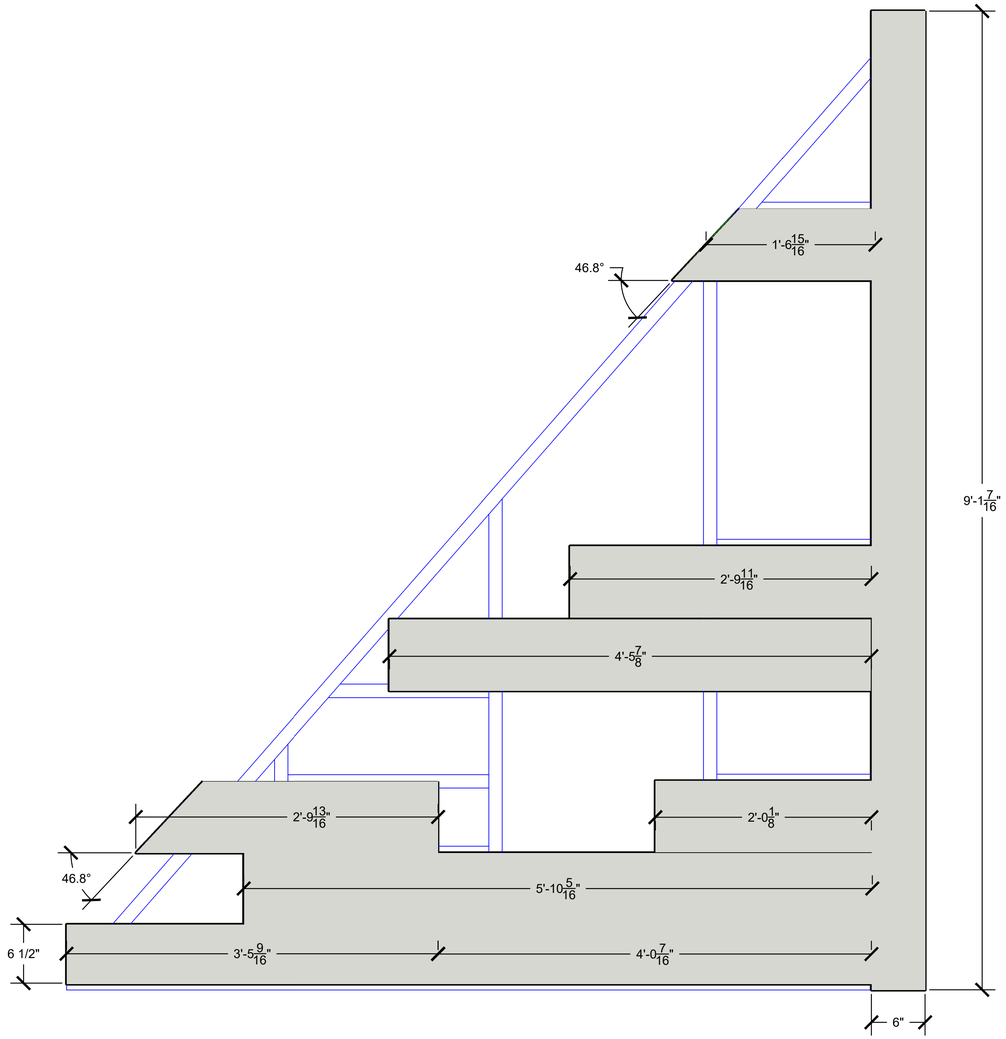


All strips are 8" wide unless otherwise noted.


4 HSW — Side Wall Lauan Layout
Lauan — 1 1/2" = 1'-0"

See TD with questions.


Plate #: HSW	West Virginia Public Theatre
	Proof
	House Side Walls
Director: Lynn Antunovich	Technical Director: Abby Bender
Designer: Tetta Askeland	Drafter: Abby Bender
Date: 5/26/26	Scale: As Noted

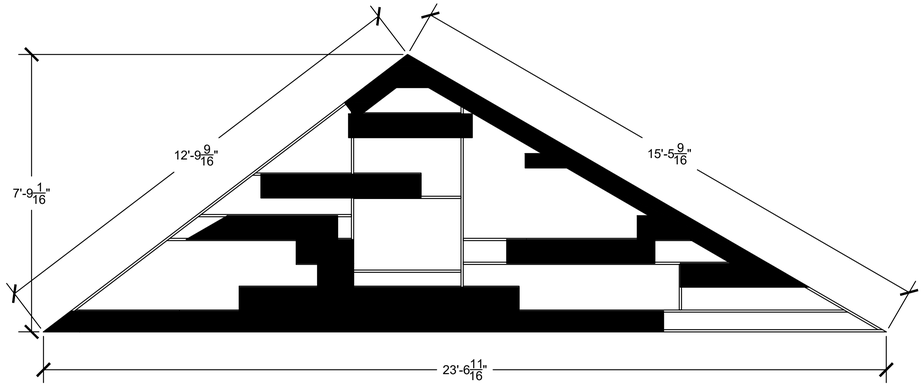


1 R — Roof Overview — 1x3 and lauan "siding" — 1/2" = 1'-0"

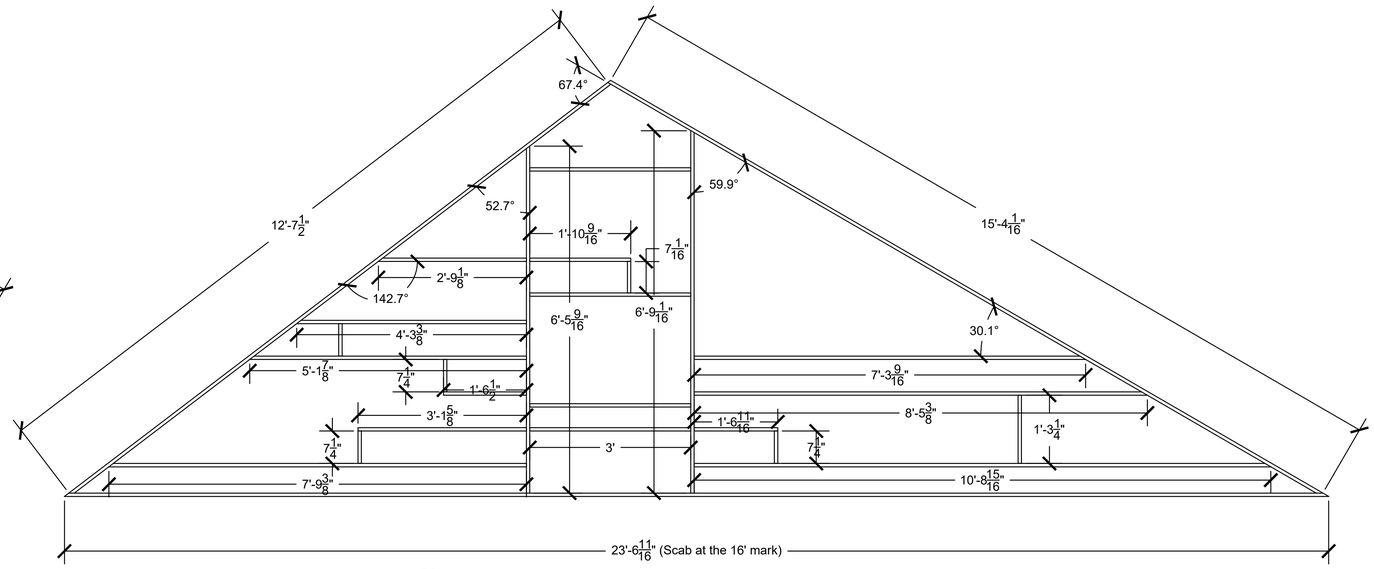


2 R — Roof Framing Sizes — 1x3 Construction — 3/4" = 1'-0"

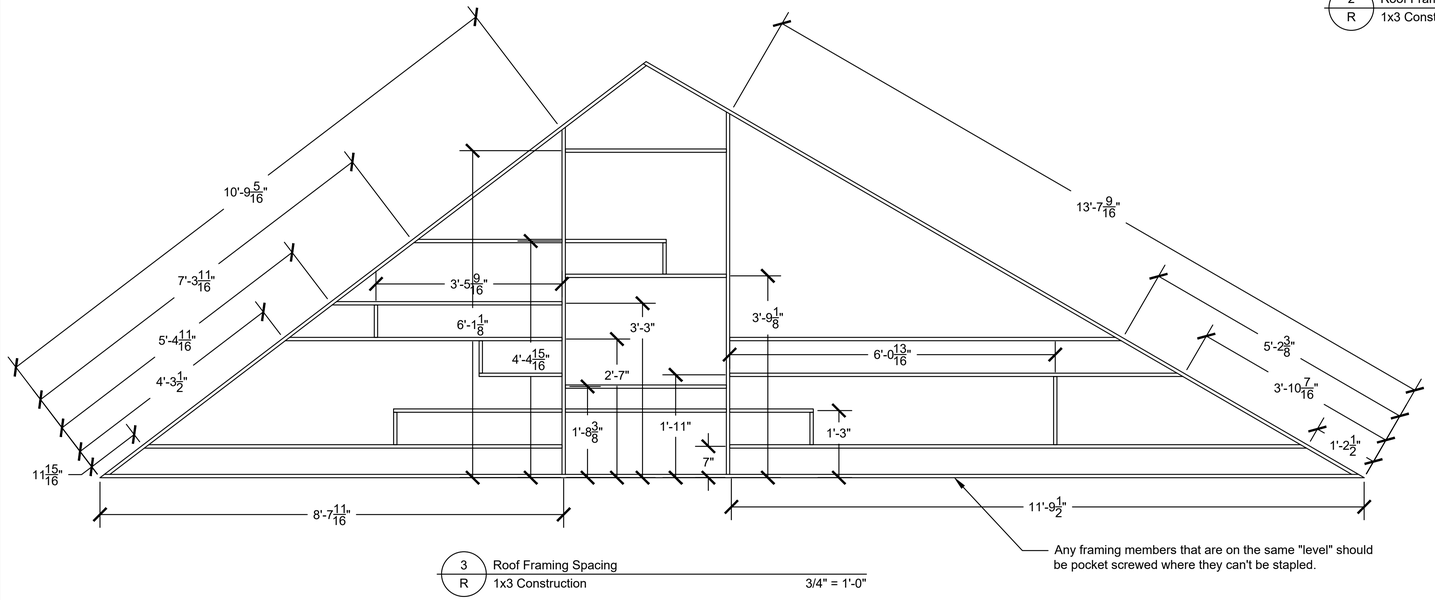

3 R — Roof Framing Spacing — 1x3 Construction — 3/4" = 1'-0"

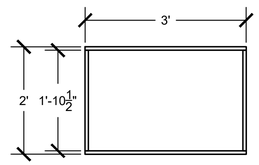

4 R — Roof Window Frame — 1x3 Construction — 3/4" = 1'-0"

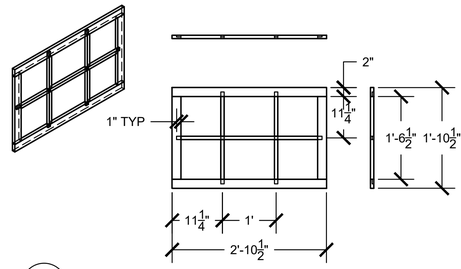

5 R — Roof Window Sash — 1x material; half lap joinery- glue and NC staple — 3/4" = 1'-0"

Standard Hollywood Flat Construction

See TD with questions.

Plate #: R	West Virginia Public Theatre
	Proof
	Roof
Director: Lynn Antunovich	Technical Director: Abby Bender
Designer: Tetta Askeland	Drafter: Abby Bender
Date: 5/24/26	Scale: As Noted